



A family company manufacturing in the USA

www.glastender.com



F1SL24
stainless steel door, and
stainless steel top



Capable of storing
specialty cocktail ice



Intertek
EP 5016978
Energy Performance
Verified / Rendement
Énergétique Vérifié



Intertek 4004503
Conforms to NSF/ANSI STD 7
and UL STD 471
Certified to CSA STD C22.2 No. 120



Project: _____	AIA# _____
Item #: _____	Qty: _____
Model #: _____	SIS# _____

**Frosters,
One Zone, Side Serviced,
Low Profile**


F1SL

F1SL24, F1SL28, F1SL36, F1SL44, F1SL48

CONFIGURATION HIGHLIGHTS



**Doors
In Nine
Finishes**



**Drawers
In Five
Finishes**

Configurable Options

Refrigeration Compartment

Location:

- Left or Right

Refrigeration Compartment Cover Finish:

- Black vinyl-clad
- Stainless steel
- Jeweled stainless
- Laminated
- Unlaminated

Door Style & Finish:

- Black vinyl-clad
- Stainless steel
- Jeweled stainless
- Laminated
- Unlaminated
- Glass, black vinyl-clad
- Glass, stainless steel
- Glass, jeweled stainless
- Glass, laminated

Drawer Style & Finish:

- Black vinyl-clad
- Stainless steel
- Jeweled stainless
- Laminated
- Unlaminated

Door Hinge Location

- Left or Right

Door Handle:

- Signature (drawers excluded)
- Pull-tab
- Tube

Top Style:

- No finished top
- Stainless top
- Laminated top

Left and Right Side Finish:

- Black vinyl-clad
- Stainless steel
- Laminated

Back Finish:

- Galvanized steel
- Stainless steel

LED Lighting Style:

- Bright white (7,000k)
- Warm white (3,500k)
- Amber (2,700k)
- Blue

Standard Features

- Self-contained
- Stainless steel interior
- Locking door(s)
- LED interior lighting
- Two defrost cycles
- Automatic condensate evaporator
- Heated cabinet front to minimize condensation
- Three adjustable, coated-wire shelves

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Specifications subject to change without notice. For current specifications please visit our website.

Approval/Notes:

Frosters - One Zone, Side Serviced, Low Profile

Specifications

		F1SL24	F1SL28	F1SL36	F1SL44	F1SL48
Dimensions	Length	24"	28"	36"	44"	48"
	Number of Sections	1	1	2	2	2
	Door Opening	17.5"	20"	12"	16"	18"
Electrical	Electrical Supply	120V, 1 phase, 60 Hz, dedicated 15A circuit required				
	Full Load Amps	5.0				
	Plug Type	8 foot NEMA 5-15P grounded cord and plug which exits the back of refrigeration compartment				
Refrigeration	Refrigerant	R290 refrigerant - 130 grams, 4.59 oz, 0.29 pounds				
	Compressor	Reciprocating, 1/3 HP, 1300 BTUH, 0.11 Tons				
	Heat Rejection	2048 BTUH				
Operating Range		12°F (-11°C) to 35°F (2°C)				
Plumbing		Automatic condensate evaporator; no drain connection required				
Weight Bearing Capacity		Countertops and other accessories should not exceed 500 pounds per door				

Materials

- Stainless steel parts include: exterior sub-top, interior, front of cabinet, hinges, hinge and lock brackets, and optional legs
- Black vinyl-clad steel parts include: standard sides, doors and compressor cover
- Galvanized steel parts include: back and bottom
- Zinc plated CR steel parts include: leg sockets

Refrigeration

- Fin & tube evaporator with forced air circulation
- Equipped with manual fast freeze mode that accelerates the freezing process and automatically reverts back to the normal operating mode



Capacities

	F1SL24	F1SL28	F1SL36	F1SL44	F1SL48
10 oz. Mugs	101	123	171	231	261
6" High Pint Glasses	72	75	115	151	169




5400 N Michigan Rd • Saginaw, MI • 48604-9780
 989.752.4275 • 800.748.0423 • Fax 989.752.4444
 www.glastender.com

Printed in USA


Frosters - One Zone, Side Serviced, Low Profile

Drawings

PLAN VIEWS

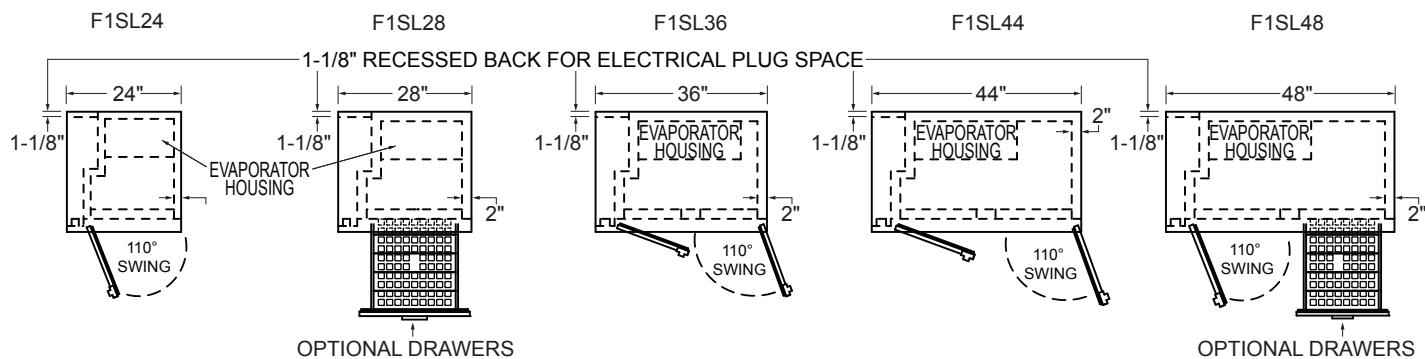


FRONT VIEWS

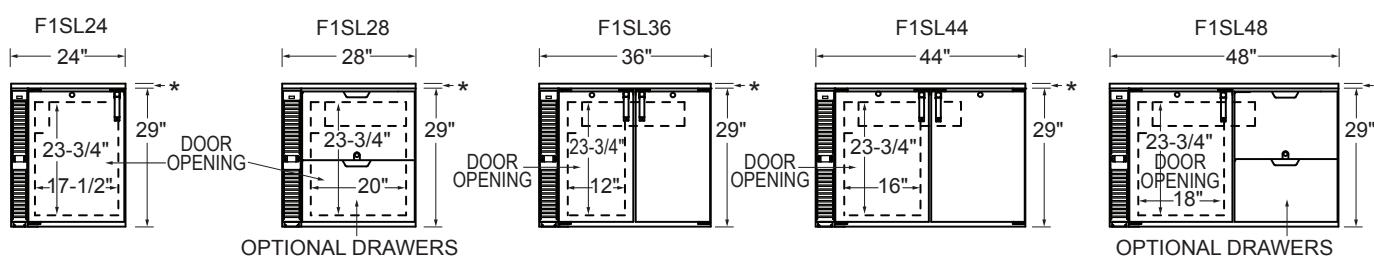



SIDE VIEWS

*ADD 1" HEIGHT TO TOP FOR FACTORY INSTALLED TOP

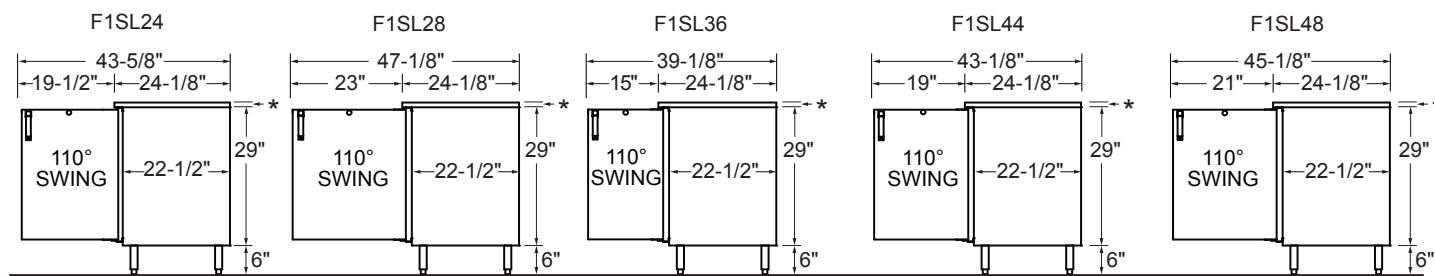


ALL SHOWN WITH OPTIONAL 6" LEGS

OPTIONAL LEGS AND CASTERS



SIDE VIEWS

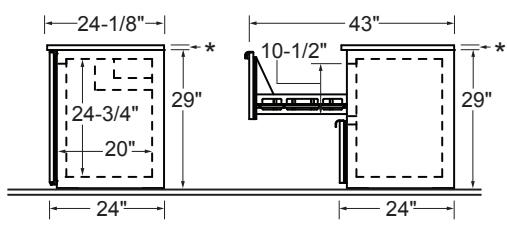

STANDARD CABINET

OPTIONAL DRAWERS