


Milk Coolers - Single Sided Door

Milk Coolers
Super Deluxe Series

Patented Self-Cleaning Condenser

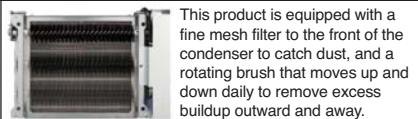

This product is equipped with a fine mesh filter to the front of the condenser to catch dust, and a rotating brush that moves up and down daily to remove excess buildup outward and away.

**Model : TMKC-58S-WA
TMKC-58S-WS
TMKC-58S-SA
TMKC-58S-SS**



FEATURES & BENEFITS

■ Maintenance-free, Self-Cleaning Condenser (patented) Only at Turbo Air

The accumulation of dust in the condenser causes the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products in refrigerators. The self-cleaning condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

■ Hot gas condensate system Only Turbo Air models

Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also prevents the overflow of condensate water.

■ Efficient refrigeration system

Turbo Air's milk coolers are designed with oversized and balanced (CFC Free R-134A) refrigeration systems. It also includes efficient evaporators and condensers for faster cooling and greater efficiency, which result in saving ownership costs. Forced-air refrigeration system keep milk cold after a prolonged period of time, allowing it to be fresh and cold.

■ Exterior digital thermometer standard

Exterior digital temperature display allows easy reading, precise, and constant temperature. This level of precision allows milk to remain fresh and safe over an extended period of time.

■ Sturdy and clean, durable cabinet construction

Exterior is stainless steel or white coated steel with stainless steel door. Interior is comprised of stainless steel.

■ High-density polyurethane insulation

The entire cabinet construction is foamed-in-place using high density, environmental friendly CFC free polyurethane insulation.

■ Convenient bottom floor drain standard with hose adapter

Floor drain is located in the rear on the right hand side for easy clean out. The hose adapter allows for convenient connecting to drain hose.

■ Stainless steel self-service doors have drop front feature and hold-open flip-up top lid

■ 4" dia. swivel casters standard for easy movement, two with brakes to lock the unit in place

■ Refrigerator holds 33°F ~ 38°F for the best in milk preservation



Model	# of Doors	# of Floor Rack	CU./FT.	Crate Capacity (13 x 13 x 11)	HP	AMPS	Crated Weight (lbs.)	L x D [*] x H [†] (inches)
TMKC-58S-**	2	3	24.5	16	1/2	7.0	371~396	58 x 32 ^{7/8} x 41 ^{5/8}

Model : TMKC-58S-**

SPECIFICATIONS	
Voltage	115/60/1
Plug Type	① NEMA 5-15P
Full Load Amperes	7.0
Compressor HP	1/2
Cord Length (ft.)	9
Refrigerant	R-134A
Net Capacity (cu. ft.)	24.5
Ext. Length (in.)	58 (1475mm)
Ext. Depth (in.)*	327/8 (836mm)
Ext. Height (in.)†	415/8 (1056mm)
# of Doors	2
Gross Weight (lbs.)	371~396
Crate Capacity (13"x13"x11")	16

Design and specifications subject to change without notice.


Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 5/8" (15mm) for bumpers.

† Height does not include 5" (127mm) for caster height.

PLAN VIEW

(unit : inch)

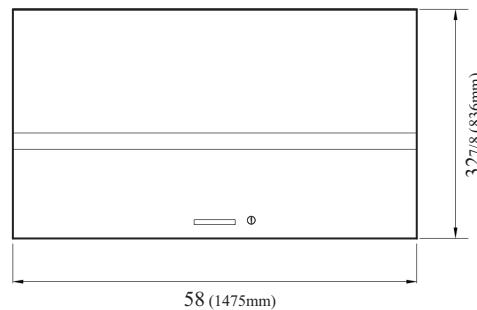

■ WARRANTY : 3 Year Parts and Labor Warranty Additional 2 Year Warranty on Compressor

** Product number


Model	Gloss Weight (lbs.)	EXTERIOR	INTERIOR
TMKC-58S-WA	379	White Vinyl & Stainless Steel	Aluminum
TMKC-58S-WS	396	White Vinyl & Stainless Steel	Stainless Steel
TMKC-58S-SA	371	Stainless Steel	Aluminum
TMKC-58S-SS	389	Stainless Steel	Stainless Steel

- Door lock standard
- Heavy duty floor racks standard
- Door support bumpers standard
- Self-contained system
- Corner bumpers available (optional)

■ OPTIONAL ACCESSORIES :

- Corner bumpers (4pcs/set): K345201160

PLAN VIEW

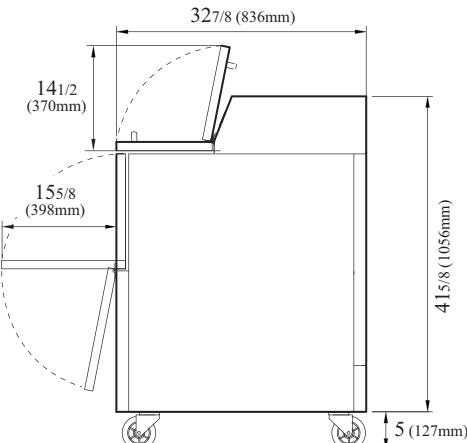

SIDE VIEW

Ver.201701



- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002