



INVENTIVE SIMPLIFICATION

# XAVC-06FS-EPR

Project\_ \_\_\_\_\_

Item\_ \_\_\_\_\_

Quantity\_ \_\_\_\_\_

Date\_ \_\_\_\_\_

## MODEL

## CHEFTOP MIND.Maps™ PLUS

- Combi steamer
- Electric
- 6 Trays 18 x 26
- Hinged Left
- 12 2" 12 x 20 (Hotel Pans)
- (Right Hand Door)
- Loaded side by side
- 9.5" Touch control panel



## DESCRIPTION

Technologically advanced combination oven for gastronomy cooking processes (dehydrating, steaming, low temperature cooking, sous vide cooking, roasting, grilling, pan frying, regeneration and plated regeneration) and for fresh or frozen baking process thanks to **CLIMALUX™** technology that combines the production of high quality steam, **STEAM.Maxi™** with the controlled forced extraction of humidity **DRY.Maxi**.

Automatic management of cooking processes (**CHEFUNOX**) and assisted by **UNOX Intelligent Performance** artificial intelligence which guarantees perfect results and repeatability for any load size.

Best in class energy efficiency certified **ENERGY STAR**.

## KEY FEATURES

## UNOX INTELLIGENT PERFORMANCE:

- **CLIMALUX**: Precise humidity control
- **SMART.Preheating**: Automatic and intelligent cooking chamber preheating
- **ADAPTIVE.Cooking**: Automatic adjustment of time, temperature and clima condition for a perfect result for any quantity of food
- **AUTO.Soft**: Automatic temperature rising management
- **SENSE.Klean**: Automatic and intelligent washing system based on actual oven use

## DATA DRIVEN COOKING:

- **DDC Stats**: Oven usage and consumption reports
- **DDC App**: Remote analysis of usage and consumption

## UNOX INTENSIVE COOKING:

- **STEAM.Maxi**: Humidity and steam production
- **DRY.Maxi**: Forced extraction of humidity
- **AIR.Maxi**: Multiple fans and auto-reversing fan speed
- **EFFICIENT.Power**: Triple glass insulation, Energy Star Certified

## STANDARD TECHNICAL FEATURES

- **ROTOR.Klean**: automatic washing system
- **Multipoint core probe**: 4 sensors
- Triple glass
- **USB data**: download/upload HACCP data
- **USB data**: download/upload programs
- Integrated Det&Rinse tank
- LED chamber illumination integrated in the door.
- **ENERGY STAR** certified
- Tray supports with anti-tipping system
- Stainless steel AISI 304 cooking chamber with retrofit washing

## STANDARD COOKING FEATURES

## SETTINGS:

- **TEMPERATURE**: 86 °F - 500 °
- **CLIMA.Control**: Humidity or dry air set by 10%.
- **FANS**: 4 fan speeds with auto-reverse and pulse function
- Up to 9 cooking steps
- Multipoint core probe
- Delta T cooking option
- **MIND.Maps™**: The new intuitive visual language setting to create your perfect cooking program

## PROGRAMS:

- 1000+ programs
- **CHEFUNOX**: Automatic cooking programs
- **MULTITIME**: Up to 10 timers for multiple products cooking in the same environments
- **MISE EN PLACE**: Timed loading of up to 9 different items so they are all ready at the same time
- **READYCOOK**: Ready to use settings for a quick start
- **MIND.Maps™**: Up to 48 custom MIND.Maps™


## UNOX INTENSIVE COOKING:

- **STEAM.Maxi**: Humidity and steam production
- **DRY.Maxi**: Forced extraction of humidity
- **AIR.Maxi**: Multiple fans and auto-reversing fan speed

## APP &amp; WEB SERVICES

- Data Driven Cooking App and website
- Top Training smartphone app
- Combi guru smartphone app



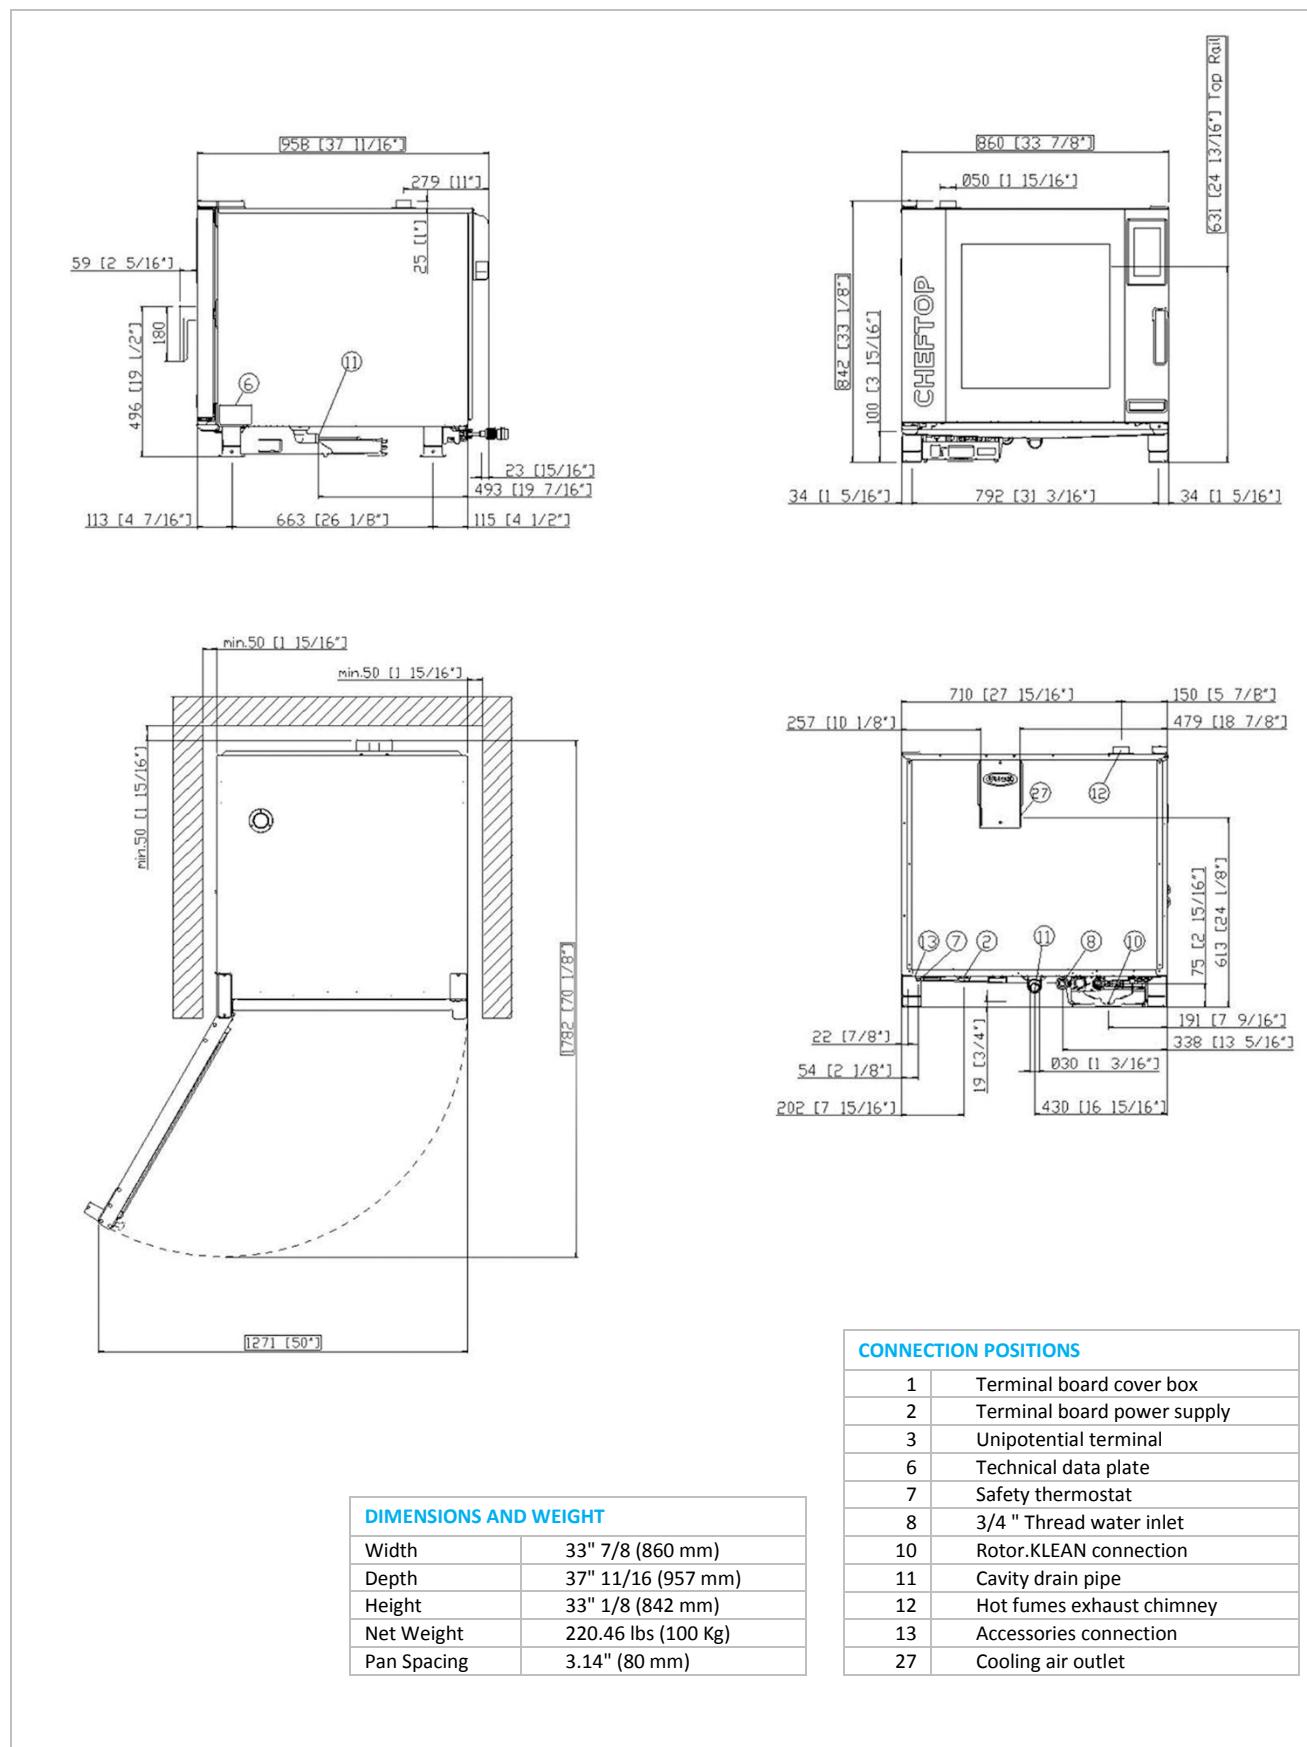



INVENTIVE SIMPLIFICATION

# XAVC-06FS-EPR

Power supply  
Water connections  
Installation requirements  
Accessories

<p><b>POWER SUPPLY</b></p> <table border="1"> <thead> <tr> <th colspan="2">STANDARD</th></tr> </thead> <tbody> <tr> <td>Voltage</td><td>208-240 V</td></tr> <tr> <td>Phase</td><td>3PH+PE</td></tr> <tr> <td>Cycle</td><td>60 Hz</td></tr> <tr> <td>Total power</td><td>14.3 – 19.1 kW</td></tr> <tr> <td>Maximum Amp Draw</td><td>47.1 A</td></tr> <tr> <td>Required breaker size *</td><td>60 A</td></tr> <tr> <td>Power cable requirement</td><td>Cu 90°C 4 x AWG6</td></tr> <tr> <td>Cord diameter</td><td>1.11"</td></tr> <tr> <td>Plug</td><td>NOT INCLUDED</td></tr> </tbody> </table> <p>* Recommended size - observe local ordinances</p>	STANDARD		Voltage	208-240 V	Phase	3PH+PE	Cycle	60 Hz	Total power	14.3 – 19.1 kW	Maximum Amp Draw	47.1 A	Required breaker size *	60 A	Power cable requirement	Cu 90°C 4 x AWG6	Cord diameter	1.11"	Plug	NOT INCLUDED	<p><b>INSTALLATION REQUIREMENTS</b></p> <p>Installations must conform to all local electrical systems, specifically Minimum wire gauge required for field connection, hydraulic and ventilation codes.</p>										
STANDARD																															
Voltage	208-240 V																														
Phase	3PH+PE																														
Cycle	60 Hz																														
Total power	14.3 – 19.1 kW																														
Maximum Amp Draw	47.1 A																														
Required breaker size *	60 A																														
Power cable requirement	Cu 90°C 4 x AWG6																														
Cord diameter	1.11"																														
Plug	NOT INCLUDED																														
<p><b>WATER CONNECTION</b></p> <table border="1"> <thead> <tr> <th colspan="2">SUPPLY</th> </tr> </thead> <tbody> <tr> <td colspan="2">USING A WATER SUPPLY NOT MEETING UNOX's MINIMUM WATER QUALITY STANDARDS WILL VOID ANY WARRANTY.</td></tr> <tr> <td colspan="2">It is the responsibility of the purchaser to ensure that the incoming water supply is compliant with the specifications listed through adequate treatment measures.</td></tr> <tr> <td>Line pressure:</td><td>Drinking water inlet: 3/4" NPT*, line pressure: 21 to 87 psi; 1.5 to 6 Bar</td></tr> <tr> <td>Connection</td><td>cold water</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th colspan="2">INFLOW WATER SPECIFICATIONS</th> </tr> </thead> <tbody> <tr> <td>Free chlorine</td><td>≤ 0.1 ppm</td></tr> <tr> <td>Chloramine</td><td>0.1 ppm</td></tr> <tr> <td>TDS</td><td>≤ 125 ppm</td></tr> <tr> <td>Silica</td><td>≤ 12 ppm</td></tr> <tr> <td>pH</td><td>7 ÷ 8.5</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th colspan="2">STEAM CIRCUIT: INFLOW WATER SPECIFICATIONS</th> </tr> </thead> <tbody> <tr> <td>Total hardness (TH)</td><td>≤ 8 °DH</td></tr> <tr> <td>Chlorides</td><td>≤ 25 ppm</td></tr> <tr> <td>Alkalinity</td><td>≤ 150 ppm as CaCO3</td></tr> </tbody> </table>	SUPPLY		USING A WATER SUPPLY NOT MEETING UNOX's MINIMUM WATER QUALITY STANDARDS WILL VOID ANY WARRANTY.		It is the responsibility of the purchaser to ensure that the incoming water supply is compliant with the specifications listed through adequate treatment measures.		Line pressure:	Drinking water inlet: 3/4" NPT*, line pressure: 21 to 87 psi; 1.5 to 6 Bar	Connection	cold water	INFLOW WATER SPECIFICATIONS		Free chlorine	≤ 0.1 ppm	Chloramine	0.1 ppm	TDS	≤ 125 ppm	Silica	≤ 12 ppm	pH	7 ÷ 8.5	STEAM CIRCUIT: INFLOW WATER SPECIFICATIONS		Total hardness (TH)	≤ 8 °DH	Chlorides	≤ 25 ppm	Alkalinity	≤ 150 ppm as CaCO3	<p><b>ACCESSORIES</b></p> <p><b>Det&amp;Rinse PLUS:</b> Concentrated detergent and rinse aid  <b>VENTLESS HOOD:</b> Steam condensing hood (water required)  <b>COOKING ESSENTIALS:</b> Special trays  <b>UNOX.FINEST</b>  <b>UNOX.PURE:</b> Ion exchange water treatment system.  <b>Sous-vide</b> extra-fine core probe for sous-vide  <b>Wi/Fi</b> connection board to keep the oven connected to UNOX cloud mandatory to extend warranty  <b>HYPER.Smoker</b> Smoker box for wood chips and sawdust to smoke inside the cooking chamber without extra electrical supply  <b>SMART.Drain</b> Special smart valve, that allows the fat collection from cooking process, to protect the drain from blocks  Available in different voltage</p>
SUPPLY																															
USING A WATER SUPPLY NOT MEETING UNOX's MINIMUM WATER QUALITY STANDARDS WILL VOID ANY WARRANTY.																															
It is the responsibility of the purchaser to ensure that the incoming water supply is compliant with the specifications listed through adequate treatment measures.																															
Line pressure:	Drinking water inlet: 3/4" NPT*, line pressure: 21 to 87 psi; 1.5 to 6 Bar																														
Connection	cold water																														
INFLOW WATER SPECIFICATIONS																															
Free chlorine	≤ 0.1 ppm																														
Chloramine	0.1 ppm																														
TDS	≤ 125 ppm																														
Silica	≤ 12 ppm																														
pH	7 ÷ 8.5																														
STEAM CIRCUIT: INFLOW WATER SPECIFICATIONS																															
Total hardness (TH)	≤ 8 °DH																														
Chlorides	≤ 25 ppm																														
Alkalinity	≤ 150 ppm as CaCO3																														

Register to access data and  
product specifications  
[infonet.unox.com](http://infonet.unox.com)

