


Return gas temp. 40°F, 5°F sub cooling

Specifications:

Model	AJA2422ZXAXC	Model	AJA2422ZXAXC
Nominal Volts-Hz-Ph	115/60/1; 100/50/1	Condenser	50803-1
Unit Bill of Material	2D253-1	Receiver	51080-1
Voltage Range	103.5 to 126.5	Liquid Valve -Receiver	31584-1
Min. Circuit Ampacity	10.7	Rotolock Valve Gasket	30334
Max. Fuse Size (amps)	15	Suction Valve	31547-7
Compressor Model	AJA2419ZXA	Rotolock Valve Gasket	30334
Comp. Bill of Material	AJ303AT-336-P2	Fan Shroud	70766-1
Alt. Comp. Bill of Mat.	-----	Fan Blade	51564-1
Compressor RLA/LRA	8.10/68.0	Fan Guard	70785-2
Overload	8300CRBL10		
Relay	820ARR3B92		
Alternate Relay	8200128H53		
Start Capacitor	85PS110A15		
Start Capacitor Rating	270-324 μ F/110V		
Run Cap.	85PR370E36 or F40		
Run Cap. Rating	15 μ F/370 V		
Fan Motor	810M009B48 or B24	Unit Drawing	SU1893-34
Fan RLA	0.53 Amps	Electrical Drawing	90657
		Design Pressures (L/H)	181 PSIG / 450 PSIG

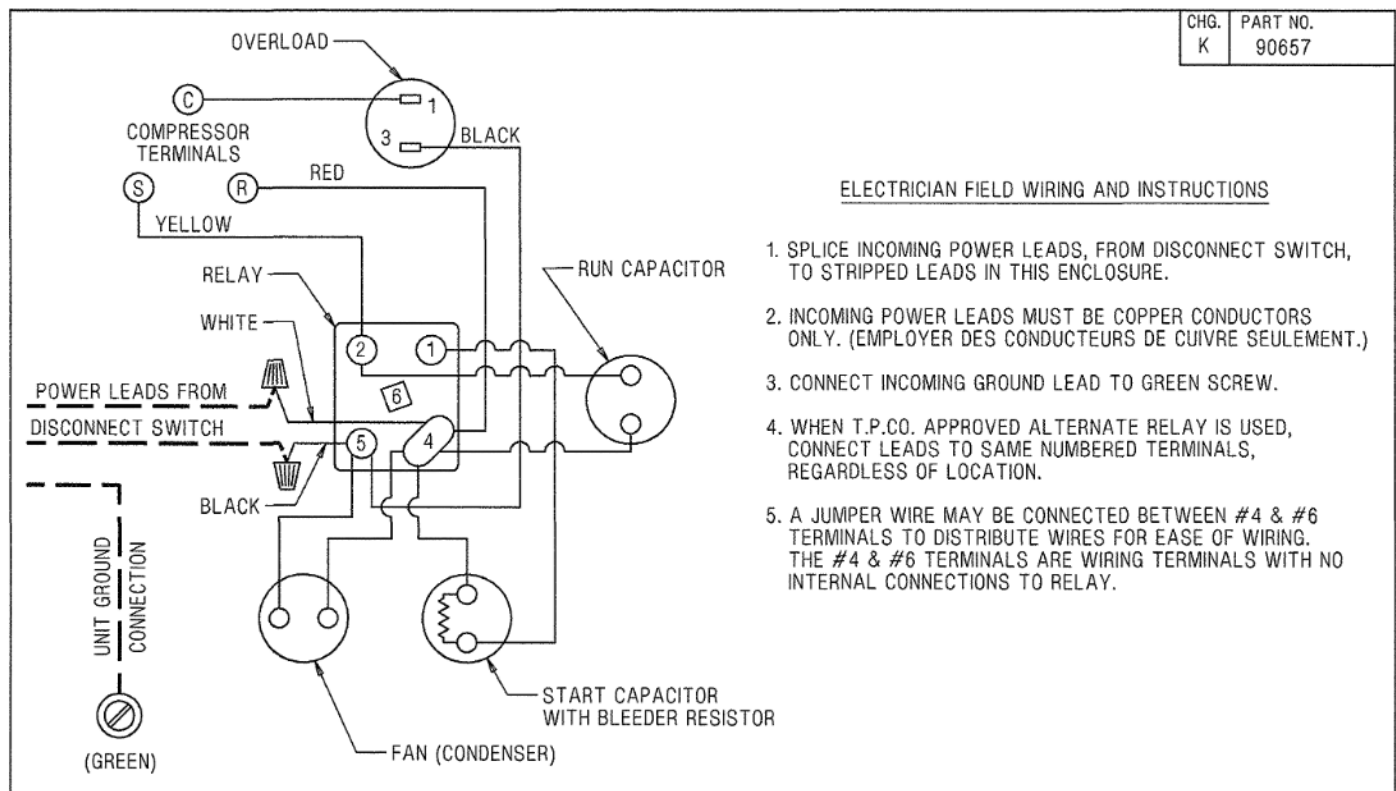

S.E.

