

Milk Coolers - Single Sided Door

Milk Coolers
Super Deluxe Series

**Model : TMKC-34S-WA
TMKC-34S-WS
TMKC-34S-SA
TMKC-34S-SS**



**Self-Cleaning
Condenser**



NO MAINTENANCE REQUIRED

FEATURES & BENEFITS

■ **Self-cleaning condenser device** Only at Turbo Air

The accumulation of dust in the condenser causes the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products in refrigerators. The self-cleaning condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

■ **Hot gas condensate system** Only Turbo Air models

Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also prevents the overflow of condensate water.

■ **Efficient refrigeration system**

Turbo Air's milk coolers are designed with oversized and balanced (CFC Free R-134A) refrigeration systems. It also includes efficient evaporators and condensers for faster cooling and greater efficiency, which result in saving ownership costs. Forced-air refrigeration system keep milk cold after a prolonged period of time, allowing it to be fresh and cold.

■ **Exterior digital thermometer standard for easy visibility**

Exterior digital temperature display allows easy reading, precise, and constant temperature. This level of precision allows milk to remain fresh and safe over an extended period of time.

■ **Sturdy and clean, durable cabinet construction**

Exterior is stainless steel or white coated steel with stainless steel door. Interior is comprised of stainless steel.

■ **High-density polyurethane insulation**

The entire cabinet construction is foamed-in-place using high density, environmental friendly CFC free polyurethane insulation.

■ **Convenient bottom floor drain standard with hose adapter**

Floor drain is located in the rear on the right hand side for easy clean out. The hose adapter allows for convenient connecting to drain hose.

■ **Stainless steel self-service doors have drop front feature and hold-open flip-up top lid**

■ **4" dia. swivel casters standard for easy movement, two with brakes to lock the unit in place**

■ **Refrigerator holds 33°F ~ 38°F for the best in milk preservation**



Model	# of Doors	# of Floor Rack	CU./FT.	Crate Capacity (13 x 13 x 11)	HP	AMPS	Crated Weight (lbs.)	L x D [*] x H [†] (inches)
TMKC-34S-**	2	2	13.7	8	1/3	5.5	267~288	34 x 32 ^{7/8} x 41 ^{5/8}

Model : TMKC-34S-**

SPECIFICATIONS	
Voltage	115/60/1
Plug Type	① NEMA 5-15P
Full Load Amperes	5.5
Compressor HP	1/3
Cord Length (ft.)	9
Refrigerant	R-134A
Net Capacity (cu. ft.)	13.7
Ext. Length (in.)	34 (864mm)
Ext. Depth (in.) *	32 7/8 (836mm)
Ext. Height (in.) †	41 5/8 (1056mm)
# of Doors	2
Gross Weight (lbs.)	267~288
Crate Capacity (13"x13"x11")	8

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 5/8" (15mm) for bumpers.

† Height does not include 5" (127mm) for caster height.

■ WARRANTY : 3 Year Parts and Labor Warranty Additional 2 Year Warranty on Compressor

** Product number

Model	Gloss Weight (lbs.)	EXTERIOR		INTERIOR
		White Vinyl & Stainless Steel	Aluminum	
TMKC-34S-WA	273	White Vinyl & Stainless Steel	Aluminum	
TMKC-34S-WS	288	White Vinyl & Stainless Steel	Stainless Steel	
TMKC-34S-SA	267	Stainless Steel	Aluminum	
TMKC-34S-SS	282	Stainless Steel	Stainless Steel	


- Door lock standard
- Heavy duty floor racks standard
- Door support bumpers standard
- Self-contained system
- Corner bumpers available (optional)

■ OPTIONAL ACCESSORIES :


- Corner bumpers (4pcs/set): K345201160

PLAN VIEW

(unit : inch)

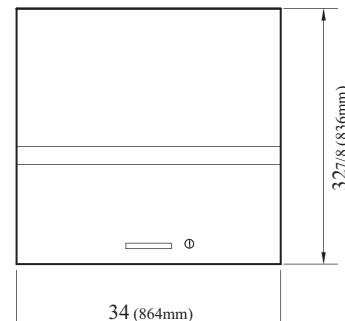

PLAN VIEW

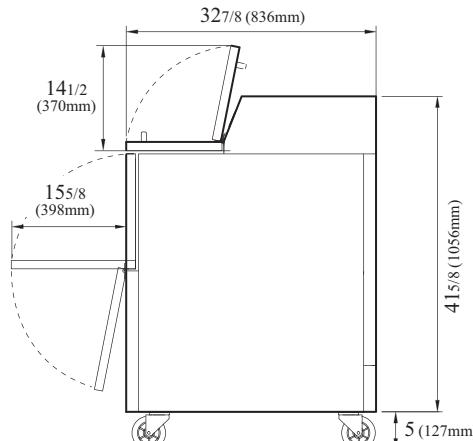

SIDE VIEW

Ver.201602



- Turbo Air : 800-627-0032 ■ GK : 800-500-3519
- Warranty : 800-381-7770 ■ AC : 888-900-1002