



Datasheet

Project:	Quantity:
Model #:	Approval:

For Commercial Use Only

Unity U-22FE 31" Economy Solid Door Commercial Reach-In Freezer



FEATURES

- 30.7" Economy One Section Reach In Freezer
- Digital temperature controller
- Bright LED interior lighting
- Durable gray painted steel exterior, HIPS(high impact polystyrene) interior
- 4 adjustable epoxy-coated shelves, one half size bottom shelf
- Adjustable rail based shelf system
- Pre-installed 2" casters, two with brakes
- Door lock keeps your foods secure overnight
- Removeable snap-in gasket
- Bottom mounted compressor
- Field reversible door
- Stainless steel door handle
- Eco-friendly R290 refrigerant

- cETLus Listed
- ETL Sanitation Listed

Conforms to UL & NSF Standards



USR Brands is a US supplier of premium quality commercial cooking, refrigeration and food preparation equipment. Our aim is simple. Produce industry-leading commercial restaurant equipment at reasonable prices, and back it all up with an easy to understand, no nonsense warranty that people can count on.



Datasheet

Project:	Quantity:
Model #:	Approval:

For Commercial Use Only

TECHNICAL DATA

DIMENSIONS

Exterior Dimensions	30.7"W x 30.8"D x 74"H
Interior Dimensions	21.9"W x 25"D x 67.2"H
Packaging Dimensions	31"W x 33.9"D x 79.7"H
Net Volume	18 cu. ft.
Unit Weight	237 lb.
Shipping Weight	264 lb.

ELECTRICAL

Voltage	110
Hertz	60
Phase	1
Amps	4.6
Watts	168W
Plug Type	NEMA 5-15P
Power Cord Length	70"

COOLING

Temperature Range	-7°F to 0°F
Refrigerant	R290
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	3/8




CONSTRUCTION

Exterior Material	Painted Sheet
Exterior Color	White Side + Black Front
Interior Material	HIPS
Insulation Material	Foamed-in-Place Polyurethane
Door Style	Swing
Door Type	Solid
Shelf Size	(4) 25"W x 20"D (1) 25"W x 10"D
Shelf Material	PVC Coated Steel
Adjustable Shelf	Yes
Interior Light	L.E.D
Mobility Wheels/Casters	(4) Qty: 2 with brakes, 2 without

TECHNICAL DRAWING

MODEL: U-22FE

MFR ITEM: BF600V

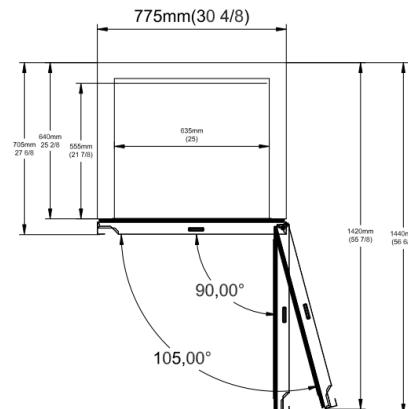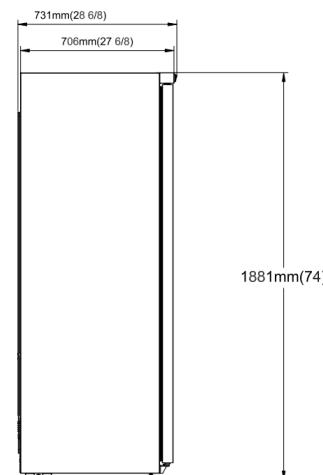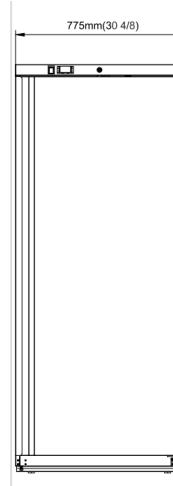

NEMA 5-15P