

Project:	Quantity:
Model #:	Approval:

For Commercial Use Only

### MDS72G 72" Black Open Air Cooler Grab and Go Refrigerator with Glass Sides, 220V



#### FEATURES

- 72" black refrigerated open curtain merchandiser
- Foamed with CFC-free polyurethane insulation
- Includes energy-saving night cover
- Easy to use digital temperature controller
- Brilliant internal LED illumination
- Stainless steel interior standard
- Durable, break-resistant glass sides
- Large open front makes access easy
- Interior Dimensions: 72" x 21.1" x 51.2"
- Eco-Friendly R290 refrigerant
- (4) 12.3" deep adjustable LED shelves with price tag
- Black powder-coated steel exterior
- Self-contained refrigeration system,
- 4 pre-installed casters, 2 leveling feet

- cETLus Listed
- ETL Sanitation listed
- Conforms to NSF/CSA Standard



USR Brands is a US supplier of premium quality commercial cooking, refrigeration and food preparation equipment. Our aim is simple. Produce industry-leading commercial restaurant equipment at reasonable prices, and back it all up with an easy to understand, no nonsense warranty that people can count on.

For Commercial Use Only

### TECHNICAL DATA

#### DIMENSIONS

Exterior Dimensions	72" x 29" x 79.9"
Packaging Dimensions	74.8" x 31.5" x 87.8"
Interior Dimensions	68.3" x 21.2" x 51.2"
Net Volume	40.9 cu. ft.
Unit Weight	646 lb.
Shipping Weight	697 lb.

#### ELECTRICAL

Voltage	220
Hertz	60
Phase	1
Wattage	2050
Amps	11
Horsepower	2 4/5
Plug Type	NEMA 6-15P
Power Cord Length	90"

#### COOLING

Temperature Range	36°F to 50°F
Refrigerant	R290
Defrosting	Automatic
Temperature Controller	Digital


#### CONSTRUCTION

Exterior Material	Black Coated
Shelf Quantity	4 + Base
Shelf Size	65.51" x 12.3"
Shelf Material	Glass
Adjustable Shelf	Yes
Interior Light	L.E.D
Mobility Wheels/Casters	4 Casters, 2 Adjustable Feet


### DIAGRAM

#### MODEL: MDS72G


MFR MODEL:

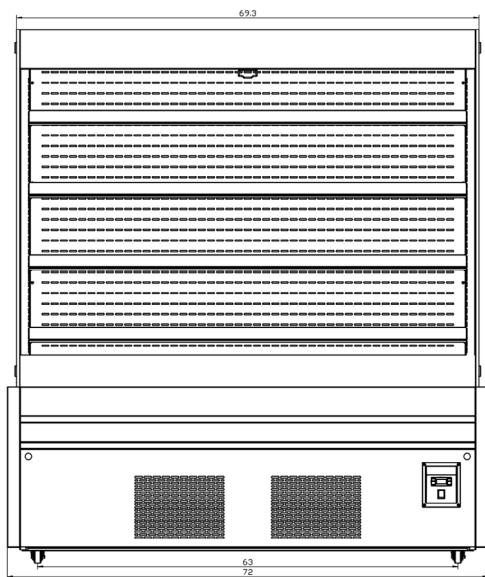

FRONT VIEW

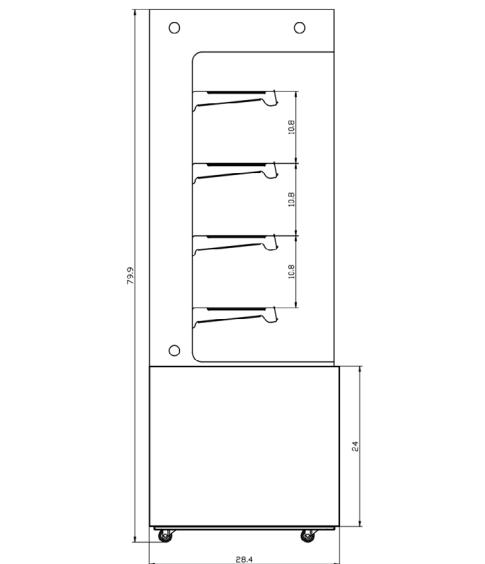

SIDE VIEW

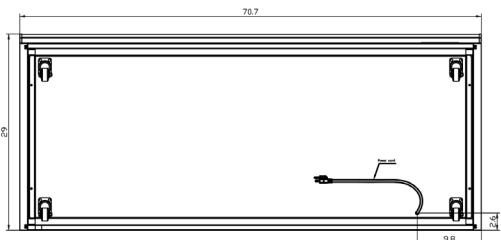

BOTTOM VIEW

- Designed to operate in locations not exceeding 75°F and 55% relative humidity.