



4184 E. Conant St.  
Long Beach, CA 90808  
Tel. 310-900-1000  
Fax. 310-900-1077  
[www.turboairinc.com](http://www.turboairinc.com)

Project :

Model # :

Item # : Qty :

Available W/H :

Approval :

## Refrigerated Bakery Case

Display Cases  
Bakery - Refrigerated cases

Model : TB-5R



### FEATURES / BENEFITS

#### ■ ENVIRONMENTALLY FRIENDLY, EFFICIENT REFRIGERATION SYSTEM

Turbo Air's refrigerators are designed with oversized and balanced environmentally friendly R-134A (CFC Free) refrigeration. These include large evaporators and condensers for faster cooling and balanced temperature throughout the cabinet.

#### ■ FRAMELESS GLASS AND ELEGANT EURO DESIGN

The frameless all sided glass display cases provide full product visibility to optimize display effects and increase impulse sales. Its elegant contemporary euro design will not only enhance any store atmosphere but also will keep product presentation at its best and beautiful.

#### ■ LIFT-UP, PNEUMATIC CYLINDER-ASSISTED CURVED TEMPERED FRONT GLASS

#### ■ SLOPED REAR DOORS FOR PRODUCT ACCESS

#### ■ INDEPENDENTLY WIRED SHELF LIGHTS

#### ■ CANTILEVERED WIRED SHELVES ADJUSTABLE UP AND DOWN, TILTED

#### ■ 304 STAINLESS STEEL FLOOR AND AIR FLOW GRILLE

#### ■ HIGH-DENSITY POLYURETHANE INSULATION

The entire cabinet structure is foamed-in-place using high density, CFC free polyurethane insulation.

#### ■ FOUR POINT LEVELING SYSTEM

#### ■ EASY ACCESS CONTROL PANEL

#### ■ REFRIGERATED BAKERY CASE HOLDS AVG. 38°F ~ 40°F FOR FRESHER BAKERY PRODUCTS

#### ■ REAR ACCESS OF COMPRESSOR COMPARTMENT FOR QUICK AND EASY SERVICE

#### ■ 5" CASTERS STANDARD

#### ■ RECOMMENDED OPERATING CONDITIONS

TB models are designed to operate in environments where temperature & humidity do not exceed 75°F and 55% relative humidity.



Model	CU./FT.	# of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D* x H <sup>†</sup> (inches)
TB-5R	18.7	2	1/2	17.2	754	59 1/4 x 37 3/8 x 47 1/4

# Refrigerated Bakery Case

Display Cases  
Bakery - Refrigerated cases

## Model : TB-5R

ELECTRICAL DATA	
Voltage	115/60/1
Plug Type	NEMA-5-20P
Full Load Amperes	17.2
Compressor HP	1/2
Refrigerant	R-134A
Cord Length (ft.)	9
DIMENSIONAL DATA	
Net Capacity cu. ft.	18.7
Ext. Length Overall in.	59 1/4 (1505mm)
Ext. Depth Overall in.*	37 3/8 (950mm)
Ext. Height Overall in.†	47 1/4 (1200mm)
Int. Length Overall in.	55 7/8 (1419mm)
Int. Depth Overall in.	26 1/2 (673mm)
Int. Height Overall in.	26 1/8 (665mm)
Crated Weight lbs.	754
# of Shelves	2
Self Size	(Top) 55 1/8 x 16 7/8 (Bottom) 55 1/8 x 25 5/8

Design and specifications subject to change without notice.


Actual shipping weight may differ due to extra packing materials for product protection.

\* Depth does not include 5/8" for door handle.


† Height does not include 5-1/4" caster height.

## PLAN VIEW

(unit : inch)

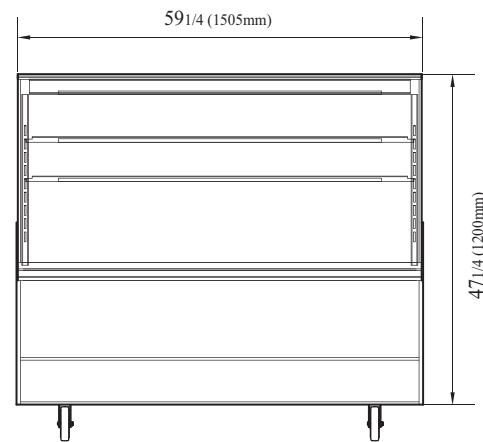

PLAN VIEW

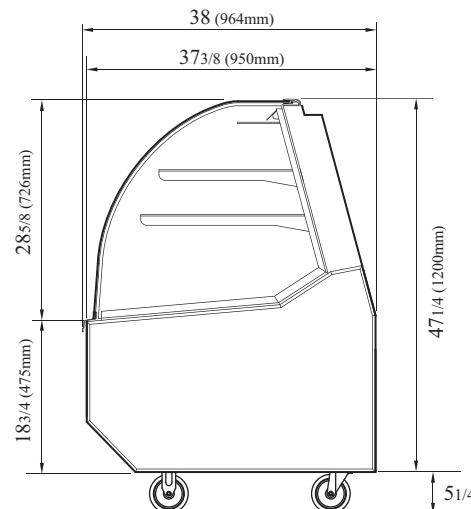

SIDE VIEW

Ver.201401



■ Turbo Air : 800-627-0032 ■ GK : 800-500-3519  
■ Warranty : 800-381-7770 ■ AC : 888-900-1002

Turbo air REFRIGERATOR MANUFACTURER

GERMAN KNIFE

RADIANCE

GREEN WORLD

Turbo air AIR CONDITIONER MANUFACTURER