

Project:	Quantity:
Model #:	Approval:

For Commercial Use Only

Marchia USTAR48G 48" Black Low Profile Open Air Cooler Grab and Go



FEATURES

- Brilliant internal LED illumination on sides
- Digital temperature controller and display
- (4) casters with (2) brakes
- 48" black horizontal air curtain merchandiser
- Foamed with CFC-free polyurethane insulation
- Includes energy-saving night cover
- Stainless steel interior standard
- Eco-Friendly R290 refrigerant
- Two-step stainless steel shelf included
- Automatic defrost

The Marchia self service display case is a valuable addition to your deli shop, sandwich shop, bakery, cafe, or other foodservice establishment. Our refrigerated bakery display case is a reliable and durable solution for displaying your hot selling treats to increase impulse sales in your business.

- cETLus Listed
- ETL Sanitation listed
- Conforms to NSF/CSA Standard



USR Brands is a US supplier of premium quality commercial cooking, refrigeration and food preparation equipment. Our aim is simple. Produce industry-leading commercial restaurant equipment at reasonable prices, and back it all up with an easy to understand, no nonsense warranty that people can count on.

TECHNICAL DATA

DIMENSIONS

Exterior Dimensions	47.2" L x 33.2" D x 46" H
Interior Dimensions	44" L x 23.3" D x 17.9" H
Packaging Dimensions	50.2" L x 36.2" D x 50.9" H
Net Volume	10.3 cu. ft.
Unit Weight	304 lb.
Shipping Weight	429 lb.

ELECTRICAL

Voltage	110
Hertz	60
Phase	1
Amps	12
Watts	1100
Plug Type	NEMA 5-20P
Power Cord Length	92"

COOLING

Temperature Range	35.6°F to 50°F
Refrigerant	R290
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/2

CONSTRUCTION


Interior Material	Stainless Steel
Shelf Quantity	1 (two-step stainless steel)
Adjustable Shelf	Yes
Features	L.E.D Lighting Night Curtain
Mobility Wheels/Casters	(4) Qty: 2 with brakes, 2 without

DIAGRAM


MODEL: USTAR48G

MFR MODEL:


FRONT VIEW

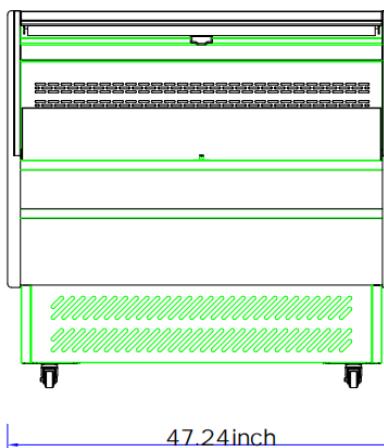

SIDE VIEW

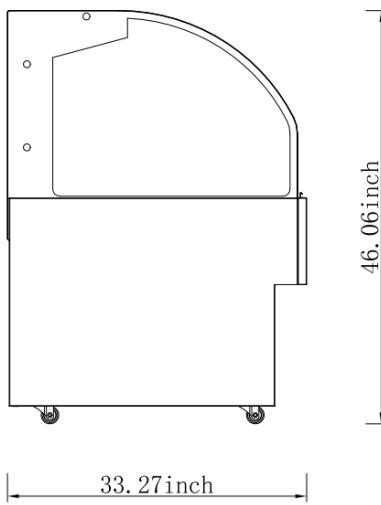

BACK VIEW

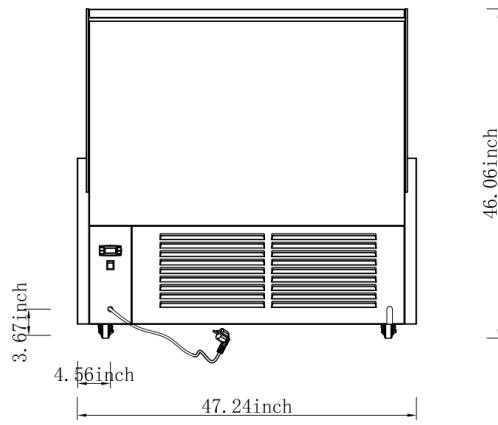

- Designed to operate in locations not exceeding 75°F and 55% relative humidity.