


## Milk Coolers - Single Sided Door

Milk Coolers  
Super Deluxe Series

### Patented Self-Cleaning Condenser



This product is equipped with a fine mesh filter to the front of the condenser to catch dust, and a rotating brush that moves up and down daily to remove excess buildup outward and away.

**Model : TMKC-34S-N-SS**



### FEATURES & BENEFITS

#### ■ Self-Cleaning Condenser

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

#### ■ Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

#### ■ Convenient bottom floor drain standard with hose adapter

Floor drain is located in the rear on the right hand side for easy clean out. The hose adapter allows for convenient connecting to drain hose.

#### ■ Stainless steel self-service doors have drop front feature and hold-open flip-up top lid

#### ■ Exterior digital thermometer standard for easy visibility

Exterior digital temperature display allows easy reading and precise and constant temperature. This level of precision allows milk to remain fresh and safe over an extended period of time.

#### ■ Sturdy and clean, durable cabinet construction

Exterior is stainless steel or white coated steel with stainless steel door. Interior is comprised of stainless steel.

#### ■ High-density polyurethane insulation

The entire cabinet construction is foamed-in-place using high density, environmental friendly CFC free polyurethane insulation.

#### ■ 4" dia. swivel casters standard for easy movement, two with brakes to lock the unit in place

#### ■ Refrigerator holds 33°F ~ 38°F for the best in milk preservation

**NATURAL**  
Refrigerant

**ETL**  
us  
Intertek

**ETL**  
us  
Intertek

**3 YEAR**  
WARRANTY

**Compressor**  
WARRANTY  
(U.S.A. only)

Model	# of Doors	# of Floor Rack	CU./FT.	Crate Capacity (13 x 13 x 11)	HP	AMPS	Crated Weight (lbs.)	L x D <sup>*</sup> x H <sup>†</sup> (inches)
TMKC-34S-N-SS	2	2	13.7	8	1/6	7	282	34 x 32 <sup>7/8</sup> x 41 <sup>5/8</sup>

## Model : TMKC-34S-N-SS

### SPECIFICATIONS

Voltage	115/60/1
Plug Type	NEMA 5-15P
Full Load Amperes	7
Compressor HP	1/6
Cord Length (ft.)	9
Refrigerant	R-290
Net Capacity (cu. ft.)	13.7
Ext. Length (in.)	34 (864mm)
Ext. Depth (in.)*	327/8 (836mm)
Ext. Height (in.)†	415/8 (1056mm)
# of Doors	2
Gross Weight (lbs.)	282
Crate Capacity (13"x13"x11")	8

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

\* Depth does not include 2" for rear spacers.

† Height does not include 5" (127mm) for caster height.

### ■ WARRANTY : 3 Year Parts and Labor Warranty Additional 2 Year Warranty on Compressor

### ■ STANDARD FEATURES


- Anti-corrosion coated evaporator
- Door lock standard
- Heavy duty floor racks standard
- Door support bumpers standard
- Self-contained system

### ■ OPTIONAL ACCESSORIES :


- Corner bumpers (4pcs/set): K345201160

### PLAN VIEW

(unit : inch)



### PLAN VIEW

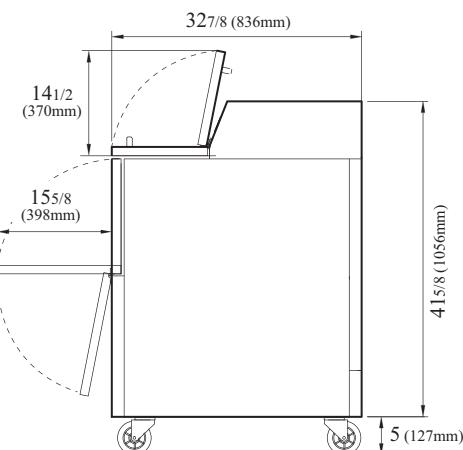

### SIDE VIEW

Ver.20190408



- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002

