

ADVANTEDGE™ SOLID DOOR BACK BAR REFRIGERATORS



NLBB69

PROJECT:

ITEM NUMBER:

MODEL NUMBER:

SOLID DOOR BACK BAR REFRIGERATORS

SPECIFICATIONS FOR: NLBB59, NLBB69, NLBB79, NLBB95

- Finish: Heavy duty stainless steel top and black exterior front, sides and back. Galvanized steel interior walls with stainless steel floor.
- Insulation: Foamed-in-place 1-1/2" CFC-free polyurethane insulation
- Hardware: Solid doors with locks, magnetic door gaskets, plastic breaker strips around door openings to limit the formation of any condensation. Two adjustable shelves per door section standard. Interior LED light.
- Electrical: 115 volt, 60 Hz, 1 phase with cord and NEMA 5-15P plug
- Refrigeration: Self-contained forced air R290 capillary tube refrigeration system. Temperature range from +34°F to +38°F. Adjustable temperature control.
- Approvals: ETL Sanitation listed, UL, C-UL Safety listed, approved to NSF standard for packaged food products **

STANDARD FEATURES

- Adjustable temperature control
- Black front, sides and back exterior
- Two adjustable shelves with clips per door section
- Free flowing air system at all times to ensure uniformly cooled product
- LED interior light
- Slide out condensing unit
- Temperature range: +34°F to +38°F
- ETL Sanitation listed, UL, C-UL Safety listed, approved to NSF standard for packaged food products **
- Warranties: 3 year parts & labor, 5 year compressor


OPTIONAL FEATURES*

- 4" plate casters
- Floor racks
- Shelves with product guides


*Most options are available one week from receipt of order. Please contact us for specific questions.

** C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.


** UL Sanitation is Underwriters Laboratories Sanitation Mark which indicates that UL has tested the equipment to applicable NSF Standards.




FRONT
NLBB69




FRONT
NLBB59




TOP
NLBB59




SIDE
ALL MODELS



TOP
NLBB69




FRONT
NLBB79




TOP
NLBB79

SPECIFICATIONS				
Models	NLBB59	NLBB69	NLBB79	NLBB95
<i>Crated Weight (lbs) (kg)</i>	276 (125)	298 (135)	400 (182)	460 (209)
<i>Crated Height (in) (cm)</i>	43-1/2 (111)	43-1/2 (111)	43-1/2 (111)	43-1/2 (111)
<i>Crated Width (in) (cm)</i>	61-1/2 (156)	71-1/4 (181)	82-5/8 (210)	97-5/8 (248)
<i>Crated Depth (in) (cm)</i>	30 (76)	30 (76)	30 (76)	30 (76)
<i>Interior Height (in) (cm)</i>	32 (81)	32 (81)	32 (81)	32 (81)
<i>Interior Width (in) (cm)</i>	54-3/4 (139)	64-3/4 (165)	76-1/2 (194)	91 (231)
<i>Interior Depth (in) (cm)</i>	21-1/2 (55)	21-1/2 (55)	21-1/2 (55)	21-1/2 (55)
<i>Overall Height (in) (cm)</i>	37 (94)	37 (94)	37 (94)	37 (94)
<i>Overall Width (in) (cm)</i>	59 (150)	69-1/8 (176)	80-3/4 (205)	95-1/4 (242)
<i>Overall Depth (in) (cm)</i>	29-5/8 (75)	29-5/8 (75)	29-5/8 (75)	29-5/8 (75)
<i>Gross Cubage (CuFt) (L)</i>	19.4 (549)	23.4 (663)	27.9 (790)	33.6 (951)
<i>Number of Shelves</i>	4	4	6	6
<i>Shelf Area (SqFt) (Sqm)</i>	14.1 (1.31)	16.9 (1.57)	19.8 (1.84)	22.6 (2.1)
<i>Condensing Unit Size</i>	3/8 HP	3/8 HP	3/8 HP	3/8 HP
<i>Refrigerant</i>	R290	R290	R290	R290
<i>Electrical Characteristics</i>	115/60/1	115/60/1	115/60/1	115/60/1
<i>Cord and Plug Furnished</i>	Yes	Yes	Yes	Yes
<i>NEMA Plug Configuration</i>	5-15P	5-15P	5-15P	5-15P
<i>Total Amp Draw</i>	3.5	3.5	3.5	3.5
<i>12 oz. Can Capacity</i>	1084	1299	1566	1875
<i>12 oz. Bottle Capacity</i>	498	594	714	858

Specifications subject to change without notice.

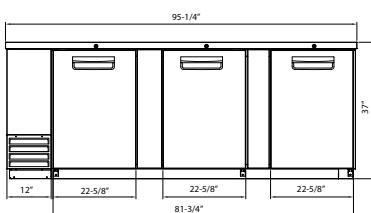

FRONT
NLBB95

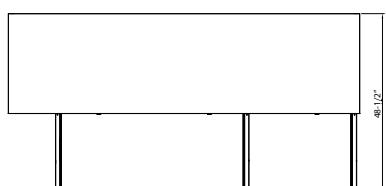

TOP
NLBB95



NORLAKE

Revision Date: 1/19
Part Number: 143584

Standex
Food Service Equipment Group