

NOR-LAKE, INCORPORATED
727 Second Street
P.O. Box 248
Hudson, Wisconsin 54016
800-955-5253
715-386-2323
866-961-5253 Parts
800-388-5253 Service
715-386-4291 FAX
www.norlake.com



ADVANTEDGE™ UNDERCOUNTER / WORKTABLE FREEZERS



NLUF60



NLUF48
(WITH OPTIONAL OVERSHELF)

PROJECT:

.....

ITEM NUMBER:

.....

MODEL NUMBER:

.....

UNDERCOUNTER / WORKTABLE FREEZERS

SPECIFICATIONS FOR: NLUF27, NLUF48, NLUF60

- Finish: Stainless steel interior and exterior
- Insulation: Complete cabinet and doors are foamed-in-place with polyurethane insulation
- Hardware: Curved handle with recessed pocket with one vinyl coated shelf per door, 6" diameter casters standard
- Electrical: 115 volt, 60 Hz, 1 phase with cord and plug
- Refrigeration: Self contained forced air refrigeration system. The condensate is collected and automatically evaporated from an energy efficient hot gas style vaporizer. Refrigerant flow is controlled by a capillary tube. R-134a refrigerant for NLUF27 and R-404a for NLUF48 and NLUF60. Temperature range: -5°F to 0°F
- Approvals: UL, C-UL and ETL Sanitation listed **

STANDARD FEATURES

- Air cooled condensing unit
- Automatic condensate vaporizer
- Automatic defrost
- Capillary tube system
- Casters
- Curved handle with recessed pocket
- Magnetic gaskets
- Self closing doors
- Stainless steel interior and exterior
- Vinyl coated shelves
- UL, C-UL and ETL Sanitation listed **
- Warranties: 3 year parts & labor, 5 year compressor

OPTIONAL FEATURES*

- Additional shelves
- Backsplash
- Low profile casters
- Overshelf assemblies







Nor-Lake, Inc.
Registered to ISO 9001:2008
File No. 10001816

* Most options are available two weeks from receipt of order. Please contact us for specific questions.


** C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.

** UL-Sanitation is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable NSF Standards.

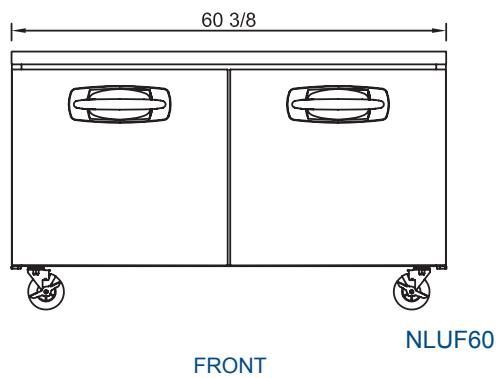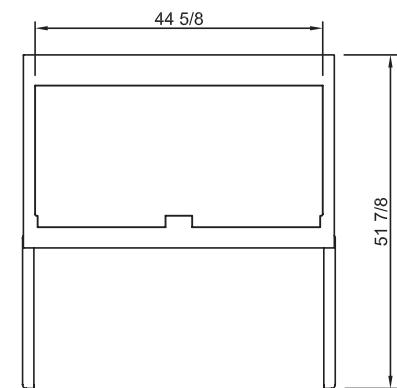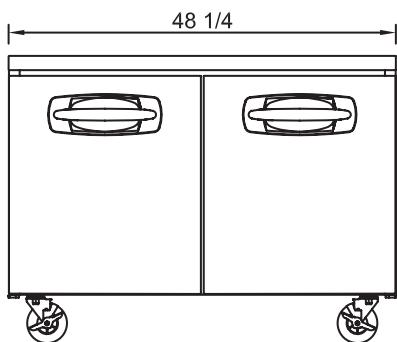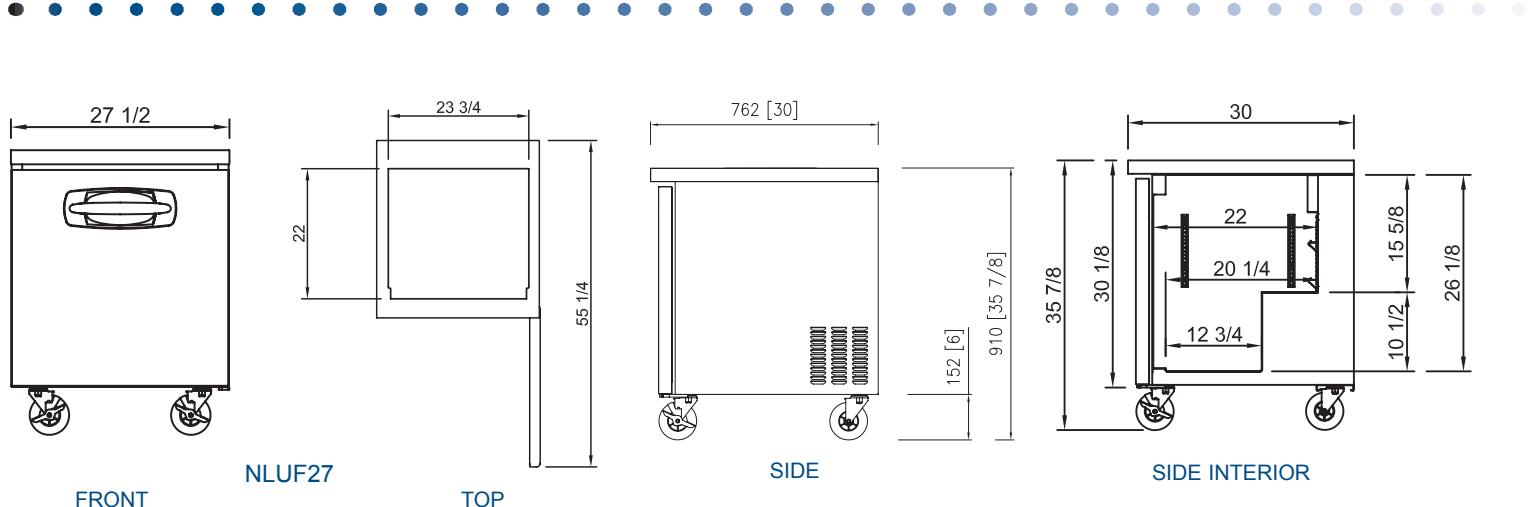

| Models | NLUF27 | NLUF48 | NLUF60 |
|----------------------------|-------------|--------------|--------------|
| Crated Weight (lbs) (kg) | 207 (93) | 298 (134) | 350 (158) |
| Crated Height (in) (cm) | 36-1/4 (91) | 36-1/4 (91) | 36-1/4 (91) |
| Crated Width (in) (cm) | 30-1/8 (75) | 51-1/8 (128) | 63 (158) |
| Crated Depth (in) (cm) | 33-1/2 (84) | 33-1/2 (84) | 33-1/2 (84) |
| Interior Height (in) (cm) | 26-1/8 (65) | 26-1/8 (65) | 26-1/8 (65) |
| Interior Width (in) (cm) | 23-3/4 (59) | 44-5/8 (112) | 56-3/4 (142) |
| Interior Depth (in) (cm) | 20-1/4 (51) | 20-1/4 (51) | 20-1/4 (51) |
| Overall Height (in) (cm) | 35-7/8 (90) | 35-7/8 (90) | 35-7/8 (90) |
| Overall Width (in) (cm) | 27-1/2 (69) | 48-1/4 (121) | 60-3/8 (151) |
| Overall Depth (in) (cm) | 30 (75) | 30 (75) | 30 (75) |
| Gross Cubage (CuFt) (L) | 7.0 (198) | 13.0 (368) | 16.0 (453) |
| Number of Shelves | 1 | 2 | 2 |
| Shelf Area (SqFt) (Sqm) | 2.75 (0.26) | 5.30 (0.49) | 7.32 (0.68) |
| Number of Casters | 4 | 4 | 4 |
| Condensing Unit Size | 3/8 HP | 1/2 HP | 1/2 HP |
| Refrigerant | R-134a | R-404a | R-404a |
| Electrical Characteristics | 115/60/1 | 115/60/1 | 115/60/1 |
| Cord and Plug Furnished | Yes | Yes | Yes |
| NEMA Plug Configuration | 5-15P | 5-15P | 5-15P |
| Total Amp Draw | 8.3 | 8.9 | 8.9 |

Specifications subject to change without notice.



NORLAKE
®

Revision Date: 03/14
©2014 Nor-Lake, Inc.
Printed in the USA
Part Number: 146623

Standex
Food Service Equipment Group