



# PIZZA PREP. TABLE SIDE MOUNTED CONDENSING UNIT

Project Name: \_\_\_\_\_  
 Project Location: \_\_\_\_\_  
 Model #: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Available Warehouse: \_\_\_\_\_

**EPP Series**

**Model: EPPR3**



## Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

## Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Open spaced interior with no walls between cabinet compartments. Vented stainless steel panel between top pan area and cabinet catches food debris.
- 16 gauge, high quality stainless steel worktop, lid and hood.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Six 5" swivel casters with locks on front set and three front leg stabilizers.

## Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.

## Preparation Area

- NSF certified polycarbonate 6" deep pans (see table for size and quantity).
- 1/2" thick, foam insulated lid keeps top pan area cold and prevents moisture build-up.
- 19 1/4" deep cutting board is removable for ease of cleaning.

## Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

## Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

## Options

- NSF certified stainless steel double overshelf.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.



Please visit our website for updated Energy Efficiency information

Ref/ Frz/Dual	Doors	Capacity Cu. Ft.	# of Pans	Shelves	Refrigerant	HP	Power V-Hz-Ph	Amps	Rated Weight	Exterior Dimensions		
										L	D	H*
REF	3	30	1/3x12	6	R-290	1/3+	115-60-1	2.5	665 lbs (302kg)	93.125" (2365mm)	36.5" (927mm)	36.25" (921mm)

(†)Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C). (►) Product capacity is calculated based on standard industry figures. (※) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.



# PIZZA PREP. TABLE SIDE MOUNTED CONDENSING UNIT

**EPP Series**      **Model: EPPR3**

## DIMENSIONAL DATA

External Dimensions	L	93.125" (2365mm)
	D	36.5" (927mm)
	H*	36.25" (921mm)
<b>Crated Weight</b>		665 lbs. (302kg)
<b>Doors/Drawers/Lids</b>		3
<b>Max Weight Support (LBS)</b>		-

## STORAGE DATA

<b>Net Capacity Cu. Ft. ▶</b>	30
<b>Shelves</b>	6
<b>Barrels</b>	-
<b>20 oz. Bottles</b>	-
<b>12 oz. Bottles</b>	-
<b>12 oz. Cans</b>	-
<b>8" Mugs</b>	-
<b># of Pans (Top)</b>	-
<b># of Pans (Drawer)</b>	1/3x12
<b>Dividers</b>	-
<b>Trays</b>	-

## ELECTRICAL DATA

<b>Voltage</b>	115-60-1
<b>Full Load Amperage</b>	2.5A
<b>Feed Wires with Ground</b>	3
<b>Cord Length</b>	9ft
<b>NEMA Plug Type</b>	115V NEMA 5-15P

## REFRIGERATION DATA



<b>Compressor Mounting</b>	Side
<b>Refrigerant</b>	R-290
<b>Compressor HP</b>	1/3+
<b>BTU/HR<sup>†</sup></b>	N/A

## KEY


D	Door	R	Refrigerator
L	Lid	REF	Refrigerator
H	Half Door	F	Freezer
FD	Full Door	FRZ	Freezer
SD	Solid Door	DUAL	REF/FRZ Combo
GD	Glass Door	DR	Drawer

KCL	Elevation	Right	Plan	3D	Back


## PLAN VIEW

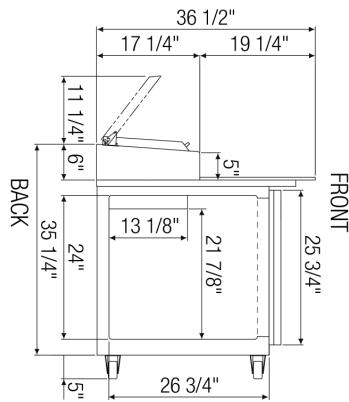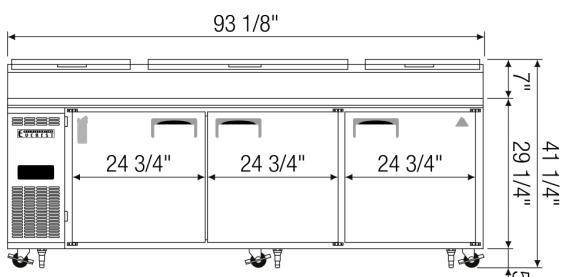

**FRONT**

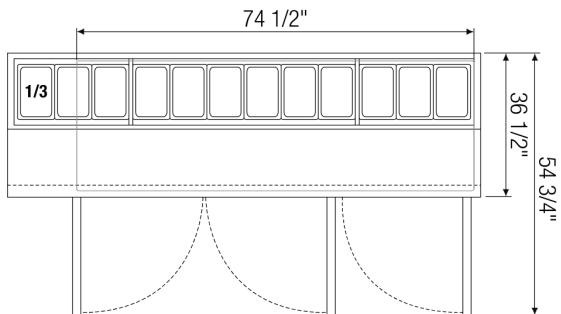

**TOP**

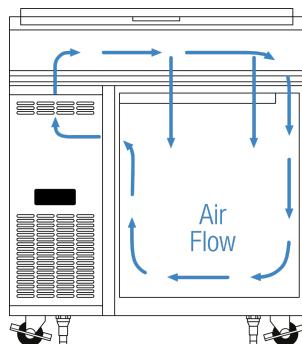

**AIRFLOW**

## ACCESSORIES & OPTIONS

Part Number	Description
<b>Additional Shelving</b>	Contact Everest Refrigeration for more information.
<b>AJL03-00</b>	Interchangeable Leg for Caster (Optional)
<b>CASA3-02</b>	3" Overall Height Caster Assembly - (3) Front (3) Rear
<b>OS29-00</b>	90" Double overshelf for side mount undercounters/prep. tables EPPR3,

(†)Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C). (▶) Product capacity is calculated based on standard industry figures. (✖) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.