

Project:	Quantity:
Model #:	Approval:

For Commercial Use Only

### Marchia MSTAR36 36" Black Dual Service Open Air Display Case Merchandiser



#### FEATURES

- Brilliant internal LED illumination on sides
- Digital temperature controller and display
- (4) casters with (2) brakes
- Refrigerated rear access top
- Foamed with CFC-free polyurethane insulation
- Includes energy-saving night cover
- Stainless steel interior standard
- Eco-Friendly R290 refrigerant
- Two-step stainless steel shelf included
- Lift up top curved glass

The Marchia dual service display case is a valuable addition to your deli shop, sandwich shop, bakery, cafe, or other foodservice establishment. Our refrigerated bakery display case is a reliable and durable solution for displaying your hot selling treats to increase impulse sales in your business.

- cETLus Listed
- ETL Sanitation listed
- Conforms to NSF/CSA Standard



USR Brands is a US supplier of premium quality commercial cooking, refrigeration and food preparation equipment. Our aim is simple. Produce industry-leading commercial restaurant equipment at reasonable prices, and back it all up with an easy to understand, no nonsense warranty that people can count on.

For Commercial Use Only

### TECHNICAL DATA

#### DIMENSIONS

Exterior Dimensions	35.4" L x 33.2" D x 60.9" H
Interior Dimensions	32.3" L x 15.1" D x 14.4" H (top) 32.3" L x 23.6" D x 17.4" H (bottom)
Packaging Dimensions	38.4" L x 36.2" D x 66.7" H
Net Volume	11.8 cu. ft.
Unit Weight	340 lb.
Shipping Weight	446 lb.

#### ELECTRICAL

Voltage	110
Hertz	60
Phase	1
Amps	12.5
Watts	1200
Plug Type	NEMA 5-20P
Power Cord Length	92"

#### COOLING

Temperature Range	35.6°F to 50°F
Refrigerant	R290
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/2

#### CONSTRUCTION

Interior Material	Stainless Steel
Shelf Quantity	1 (two-step stainless steel) 1 (glass: 29" x7.87" )
Adjustable Shelf	Yes
Features	L.E.D Lighting Night Curtain
Mobility Wheels/Casters	(4) Qty: 2 with brakes, 2 without


- Designed to operate in locations not exceeding 75°F and 55% relative humidity.

### DIAGRAM


#### MODEL: MSTAR36

MFR MODEL:

FRONT VIEW

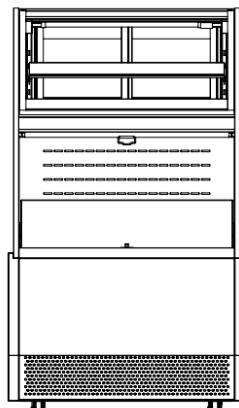

SIDE VIEW

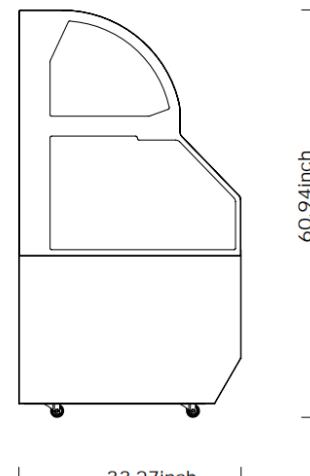

BACK VIEW

