

NOR-LAKE, INCORPORATED
727 Second Street
P.O. Box 248
Hudson, Wisconsin 54016

800-955-5253
715-386-2323
866-961-5253 Parts
800-388-5253 Service
715-386-4291 FAX
www.norlake.com

NORLAKE®



ADVANTEDGE™ UNDERCOUNTER / WORKTABLE REFRIGERATORS



NLUR60



PROJECT: _____

ITEM NUMBER: _____

MODEL NUMBER: _____

UNDERCOUNTER / WORKTABLE REFRIGERATORS

SPECIFICATIONS FOR: NLUR27, NLUR36, NLUR48, NLUR60, NLUR72

- Finish: Stainless steel interior and exterior.
- Insulation: The complete cabinet and doors are foamed-in-place with polyurethane insulation.
- Hardware: Curved handle with recessed pocket with one vinyl coated shelf per door, 6" diameter casters standard.
- Electrical: 115 volt, 60 Hz, 1 phase with cord and plug.
- Refrigeration: Self contained forced air refrigeration system. The condensate is collected and automatically evaporated from an energy efficient hot gas style vaporizer. Refrigerant flow is controlled by a capillary tube. R-134a refrigerant. Temperature range: +32°F to +40°F.
- Approvals: UL, C-UL, ETL Sanitation and ENERGY STAR® listed **

STANDARD FEATURES

- Air cooled condensing unit
- Automatic condensate vaporizer
- Automatic defrost
- Capillary tube system
- Casters
- Curved handle with recessed pocket
- Magnetic gaskets
- Self closing doors
- Stainless steel interior and exterior
- Vinyl coated shelves
- UL, C-UL, ETL Sanitation and ENERGY STAR® listed **
- Warranties: 3 year parts & labor, 5 year compressor

OPTIONAL FEATURES*

- Additional shelves
- Backsplash
- Drawers
- Low profile casters
- Overshelf assemblies








Nor-Lake, Inc.
Registered to ISO 9001:2008
File No. 10001816

* Most options are available two weeks from receipt of order. Please contact us for specific questions.

** C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.

** UL-Sanitation is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable NSF Standards.

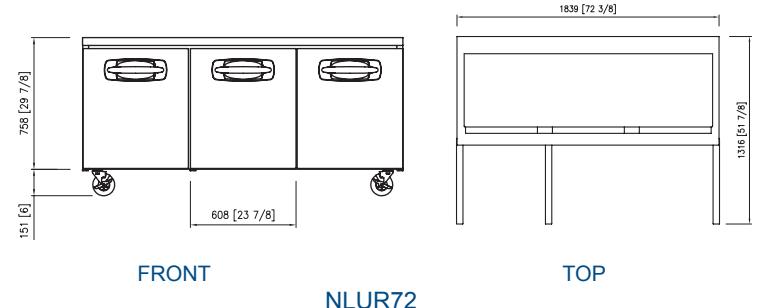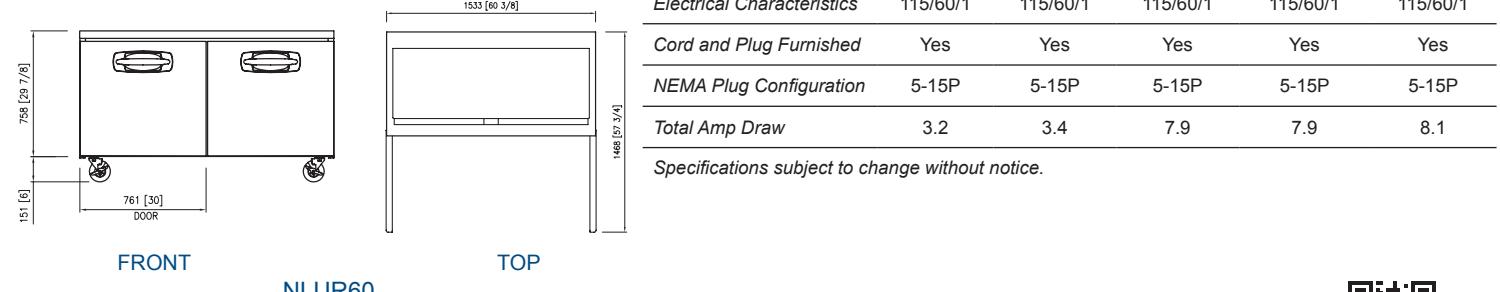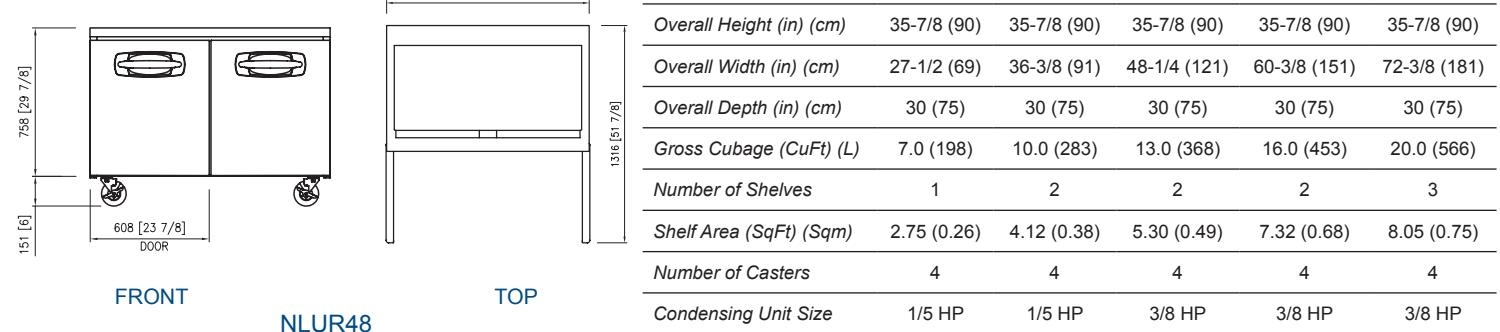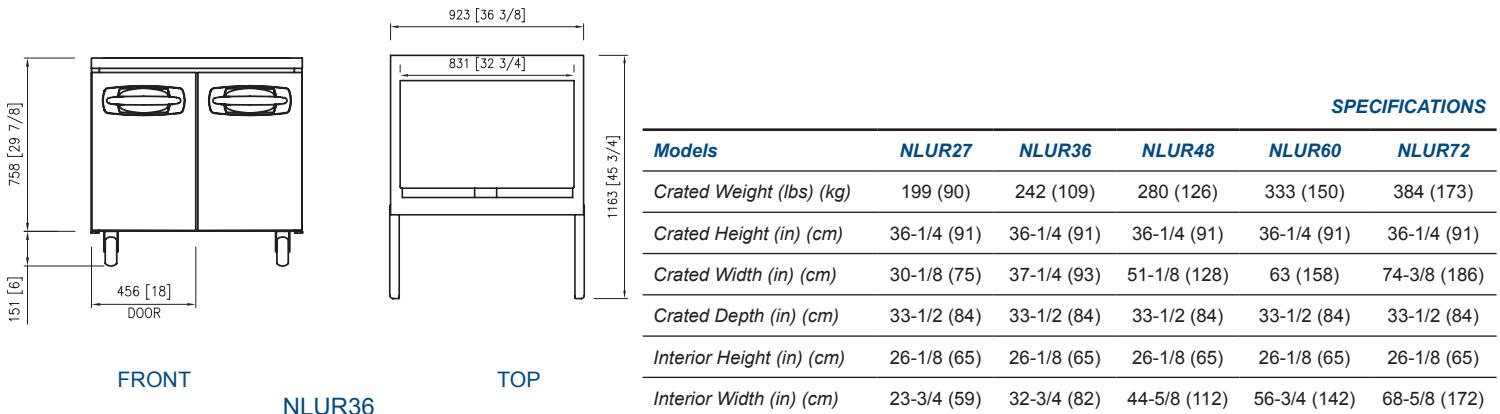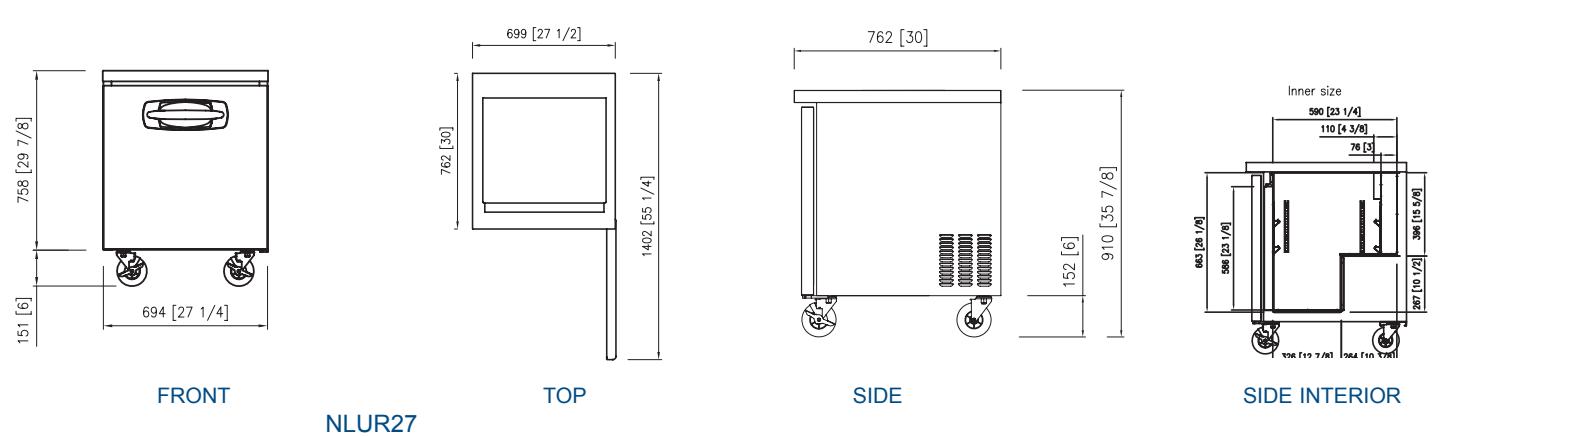

Models	NLUR27	NLUR36	NLUR48	NLUR60	NLUR72
Crated Weight (lbs) (kg)	199 (90)	242 (109)	280 (126)	333 (150)	384 (173)
Crated Height (in) (cm)	36-1/4 (91)	36-1/4 (91)	36-1/4 (91)	36-1/4 (91)	36-1/4 (91)
Crated Width (in) (cm)	30-1/8 (75)	37-1/4 (93)	51-1/8 (128)	63 (158)	74-3/8 (186)
Crated Depth (in) (cm)	33-1/2 (84)	33-1/2 (84)	33-1/2 (84)	33-1/2 (84)	33-1/2 (84)
Interior Height (in) (cm)	26-1/8 (65)	26-1/8 (65)	26-1/8 (65)	26-1/8 (65)	26-1/8 (65)
Interior Width (in) (cm)	23-3/4 (59)	32-3/4 (82)	44-5/8 (112)	56-3/4 (142)	68-5/8 (172)
Interior Depth (in) (cm)	20-1/4 (51)	20-1/4 (51)	20-1/4 (51)	20-1/4 (51)	20-1/4 (51)
Overall Height (in) (cm)	35-7/8 (90)	35-7/8 (90)	35-7/8 (90)	35-7/8 (90)	35-7/8 (90)
Overall Width (in) (cm)	27-1/2 (69)	36-3/8 (91)	48-1/4 (121)	60-3/8 (151)	72-3/8 (181)
Overall Depth (in) (cm)	30 (75)	30 (75)	30 (75)	30 (75)	30 (75)
Gross Cubage (CuFt) (L)	7.0 (198)	10.0 (283)	13.0 (368)	16.0 (453)	20.0 (566)
Number of Shelves	1	2	2	2	3
Shelf Area (SqFt) (Sqm)	2.75 (0.26)	4.12 (0.38)	5.30 (0.49)	7.32 (0.68)	8.05 (0.75)
Number of Casters	4	4	4	4	4
Condensing Unit Size	1/5 HP	1/5 HP	3/8 HP	3/8 HP	3/8 HP
Refrigerant	R-134a	R-134a	R-134a	R-134a	R-134a
Electrical Characteristics	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1
Cord and Plug Furnished	Yes	Yes	Yes	Yes	Yes
NEMA Plug Configuration	5-15P	5-15P	5-15P	5-15P	5-15P
Total Amp Draw	3.2	3.4	7.9	7.9	8.1

Specifications subject to change without notice.



NORLAKE
®

Revision Date: 11/13
©2013 Nor-Lake, Inc.
Printed in the USA
Part Number: 146627

H Standex
Food Service Equipment Group