

Project:	Quantity:
Model #:	Approval:

For Commercial Use Only

### SOCD-76-B 76" Black Deep Refrigerated Air Curtain Merchandiser, 220V



#### FEATURES

- Digital controller
- Deeper design with 31.5" depth
- Finned evaporator
- Automatic defrost
- LED light for every shelf
- With night curtain
- Adjustable shelves
- With shelf tag holder
- Pre-installed leveling feet and 1.2" casters
- 30.2 F ~ 44.6 F temperature range
- Built-in condensation evaporating systems

Coldline SOCD-76-B 76" black refrigerated air curtain merchandiser features LED lighting for each shelf, and will improve impulse sales while keeping your salads, dairy, deli or baked goods at safe cold temperatures.

- cETLus Listed
  - ETL Sanitation Listed
- Certified to NSF Standard



USR Brands is a US supplier of premium quality commercial cooking, refrigeration and food preparation equipment. Our aim is simple. Produce industry-leading commercial restaurant equipment at reasonable prices, and back it all up with an easy to understand, no nonsense warranty that people can count on.

## TECHNICAL DATA

### DIMENSIONS

Exterior Dimensions	76.2"W x 31.5"D x 78.8"H
Packaging Dimensions	79"W x 33"D x 84"H
Net Volume	33 cu. ft.
Unit Weight	774 lb.
Shipping Weight	936 lb.

### ELECTRICAL

Voltage	220
Hertz	60
Phase	1
Amps	15.13 A
Plug Type	NEMA 6-30P
Available Power Cord Length	45"

### COOLING

Temperature Range	30.2°F - 44.6°F
Refrigerant	R290
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	(2) 1

### CONSTRUCTION

Exterior Material	Painted Steel
Interior Material	Painted Steel
Insulation Material	Foamed-in-Place Polyurethane
Shelf Load Capacity	90 lb. each shelf
Shelf Material	Steel Plate
Shelf Depth	16.5"
Adjustable Shelf	Yes
Interior Light	L.E.D

## TECHNICAL DRAWING


MODEL: SOCD-76-B

MFR ITEM #:




NEMA 6-30P  
(30A circuit required)


FRONT VIEW

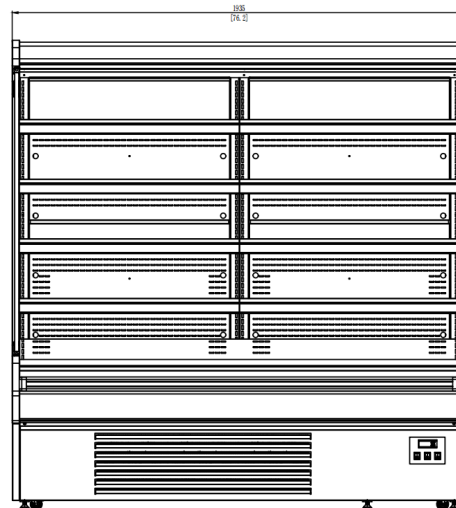


Adjustable angle  
0° 9° 18°



BACK VIEW

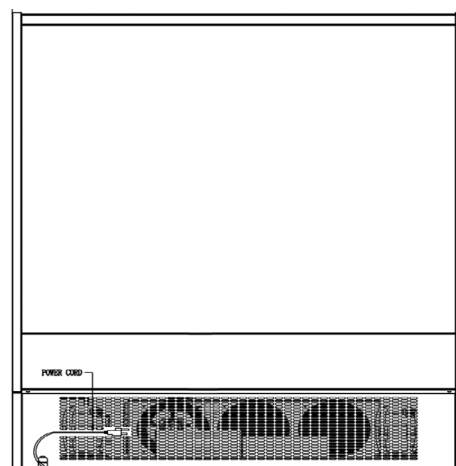

SIDE VIEW

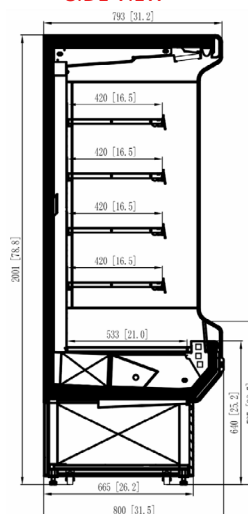

- Designed to operate in locations not exceeding 75°F and 55% relative humidity.